

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 27 TOWNSHIP 17 RANGE 5

DATE: -5-21-99- 5-16-05

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison (mag nail set over)


METHOD OF ESTABLISHMENT: County: 10-21-94

IN. S.P.C. E ZONE, NAD 83

NAME: 17052704

N: 515481.6110(m)

E: 75152.3370(m)

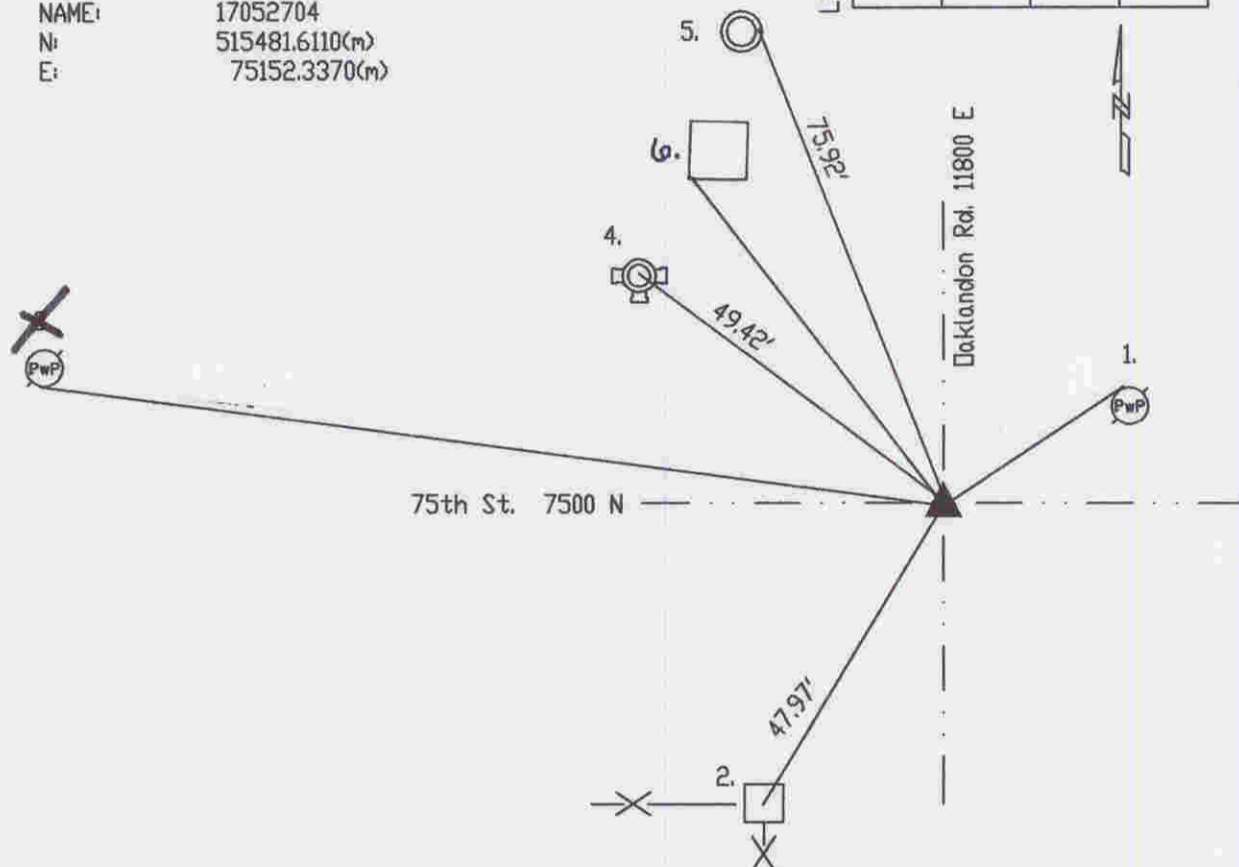

Original post set 1821 by Laughlin with witnesses: 7" beech S 40 E 25 links, 12" beech N 72 W 16 links per Marion County Atlas pg. 16. Legal 2-1849 by Hosbrook per Lawrence Township Legal Survey Book pg. 15 & 36 called corner "F" and witnesses. Legal 3-1854 by Wilson per Lawrence Township Legal Survey Book pg. 14 called corner "D" and described stone. 1-1931 Legal per Lawrence Township Legal Survey Book pg. 67 called corner stone and called it "A". 1-15-44 called for a 2" iron pipe. 5-9-51 Monroe called same. 5-2-75 Fortner called Railroad spike at corner. Ties appear to closely match '51 ties. 8-15-79 Bruer called same. Excavated 7-29-82 by Cleveland. 2" pipe found, 2' long 0.4' down. Pipe bent over, Railroad spike at surface 0.25' N of top of pipe. No stone found. Set Harrison. Re-tied 10-21-94 by Kiste. Re-tied 5-21-99 by Wilcoxon.

HC752704

REF.	DISTANCE	DESCRIPTION
1.	34.64'	PK nail N PwP no# 12' up
2.	47.97'	Road nail top corner fence post
3.	146.71'	PK nail S PwP#55-251FB 6' up
4.	49.42'	Top nut of fire hydrant
5.	75.92'	Cut 'x' E-rim bell telephone manhole
6.	61.07'	SW corner metal utility box